

## Wirewound Resistors, Open Style, Current Shunts, Custom Tailored, Very Low Value, High Precision



### FEATURES

- Custom-made four-terminal resistors to meet your individual specifications
- Extremely low resistance values for current sensing applications
- Precision resistance tolerance
- Low temperature coefficients
- Complete welded construction
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**HALOGEN  
FREE**

The mechanical configurations and electrical properties of our shunts are made to your specifications. The following are examples of “Typical Electrical Specifications” from several existing custom designs. Consult our engineering department for help in designing your own configuration and/or electrical properties, see email address at the bottom of this page.

### STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{25\text{ }^\circ\text{C}}$ W	RESISTANCE RANGE $\Omega$	TOLERANCE $\pm \%$	CURRENT RATING (maximum) A
SPU104	SPU-104	1.875	0.0025 to 0.010	1	25
SPU111...1	SPU-111-1	1	0.005	1	10
SPU114	SPU-114	1	0.00167 to 0.020	1	10

#### Note


- Resistance tolerances available are 0.1 %, 0.25 %, 0.5 %, 1.0 %, 3.0 %, and 5.0 % depending on resistor physical design and resistance value

### TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	SPU OPEN STYLE RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^\circ\text{C}$	Typical is $\pm 100$ (-10 $^\circ\text{C}$ to +80 $^\circ\text{C}$ ) consult factory for tighter TCR availability
Resistance Range	$\Omega$	Dependent upon configuration, consult factory
Maximum Current Rating	A	Dependent upon configuration, consult factory
Operating Temperature Range	$^\circ\text{C}$	-55 to +275

### GLOBAL PART NUMBER INFORMATION

Global Part Numbering example: SPU1115L0000FD1

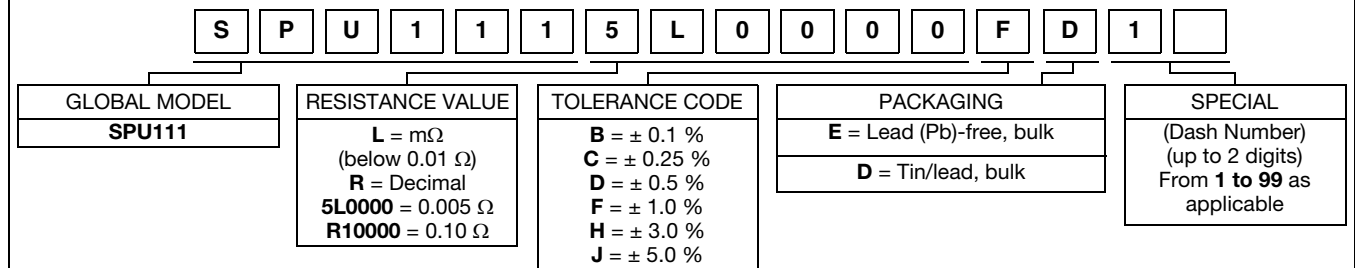


Historical Part Numbering example: SPU-111-1 0.005  $\Omega$  1 % S51







**DIMENSIONS** in inches [millimeters]  
**SPU104** Top View



Side View

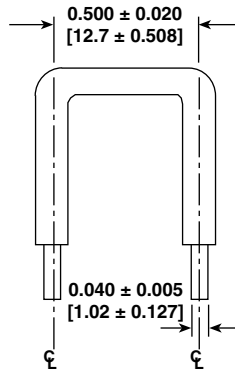


End View

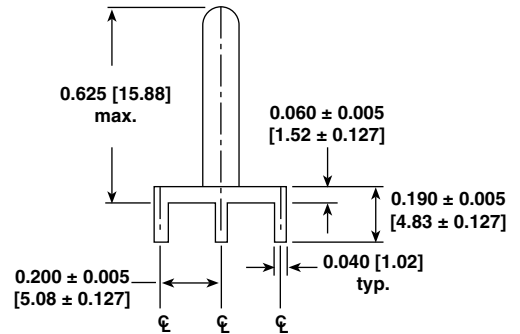


**SPU111...1**

Side View




End View




**SPU114**

Side View

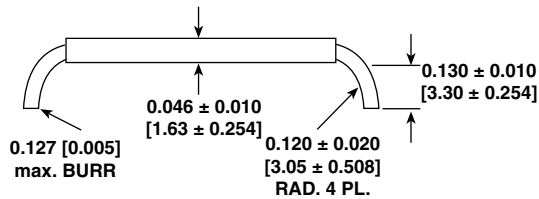

Top View

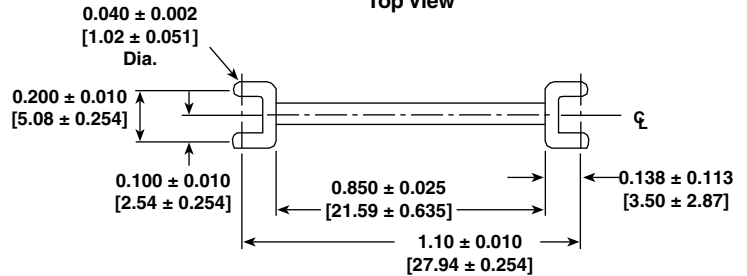

**MATERIAL SPECIFICATIONS**

**Element:** Copper-nickel alloy or nickel-chrome alloy, depending on resistor type and/or resistance value

**Coating:** None

**Standard Terminals:** SPU104: 100 % Sn, w/Nickel underplate, or 60/40 Sn/Pb coated copper


**Other Models:** 100 % Sn, w/Nickel underplate, or 60/40 Sn/Pb coated Copperweld®

**Part Marking:** None

**AMBIENT TEMPERATURE DERATING**

Derating is required for ambient temperatures above 25 °C per the following graph:

**DERATING**

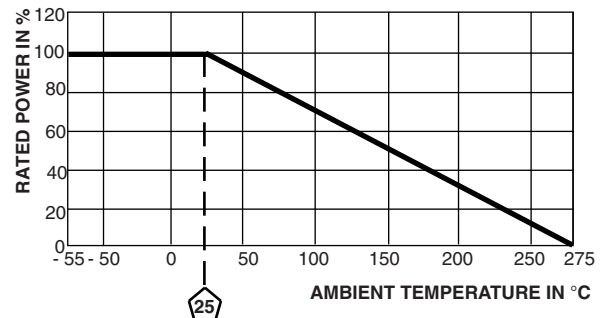



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.